


Adhesive-Backed, Cut and Extruded UHMW Wear Strips

Benefits of Adhesive-Backed Wear Strips

- No drilling and bolting required
- Not using fasteners gives equipment a clean appearance
- Lower profile, so you can use thin strips of material and get all the benefits of UHMW
- Can be ordered at the width you need, from 1/4" to 24"
- Long rolls (50', 54', and 100') minimize seams
- Available in a range of thicknesses from .003" to .125"
- Using adhesive-backed wear strips is more sanitary than fasteners. The UHMW bonds completely to the conveyor frame, eliminating the possibility of bacteria growing between the frame and wearstrip or at the fasteners.

BETTER THAN TRADITIONAL FASTENERS!

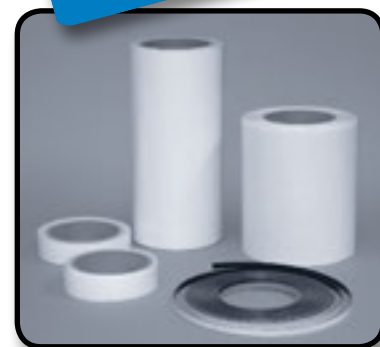

UHMW Formulations

As with other **Slideways** products, adhesive-backed wear strips are available in many UHMW formulations to maximize performance. The high performance formulations include DrySlide, High-Temp/UHMW, UV Protected/UHMW and Anti-Static/UHMW. Adhesive-backed wear strips are available in Natural (white) and Black UHMW.

Adhesive-Backed Components

Slideways helps you improve the appearance and sanitation of equipment with pressure-sensitive adhesive (PSA) backed chain guides, channels and belt guides. Consult with your Slideways representative to learn about proper surface preparation.

54' Skived Rolls (add .005" for adhesive)

Width	0.003" thick	0.005" thick	0.01" thick	0.015" thick
1/4"	33010030025	33010050025	33010100025	33010150025
1/2"	33010030050	33010050050	33010100050	33010150050
3/4"	33010030075	33010050075	33010100075	33010150075
1"	33010030100	33010050100	33010100100	33010150100
1 1/2"	33010030150	33010050150	33010100150	33010150150
2"	33010030200	33010050200	33010100200	33010150200
3"	33010030300	33010050300	33010100300	33010150300
4"	33010030400	33010050400	33010100400	33010150400
6"	33010030600	33010050600	33010100600	33010150600
8"	33010030800	33010050800	33010100800	33010150800
10"	33010031000	33010051000	33010101000	33010151000
12"	33010031200	33010051200	33010101200	33010151200
18"	33010031800	33010051800	33010101800	33010151800
24"	33010032400	33010052400	33010102400	33010152400


50' or 100' Skived Rolls (add .005" for adhesive)

Width	0.03" thick	0.062" thick	0.093" thick	0.1" thick	0.125" thick
1/4"	—	—	—	—	—
1/2"	33010300050	33010620050	33010930050	33011000050	33011250050
3/4"	33010300075	33010620075	33010930075	33011000075	33011250075
1"	33010300100	33010620100	33010930100	33011000100	33011250100
1 1/2"	33010300150	33010620150	33010930150	33011000150	33011250150
2"	33010300200	33010620200	33010930200	33011000200	33011250200
3"	33010300300	33010620300	33010930300	33011000300	33011250300
4"	33010300400	33010620400	33010930400	33011000400	33011250400
6"	33010300600	33010620600	33010930600	33011000600	33011250600
8"	33010300800	33010620800	33010930800	33011000800	33011250800
10"	33010301000	33010621000	33010931000	33011001000	33011251000
12"	33010301200	33010621200	33010931200	33011001200	33011251200
18"	33010301800	33010621800	33010931800	33011001800	33011251800
24"	33010302400	33010622400	33010932400	33011002400	33011252400

Cut Wear Strip

Material	Thickness Range	Width Range	Length
UHMW and UHMW Formulations	1/8" to 3"	1/2" to 48"	10 ft
MD-Nylon	1/8" to 2"	1/2" to 48"	up to 10 ft*
Nylon	1/8" to 2"	1/2" to 48"	48"
Acetal	1/4" to 2"	1/2" to 48"	48"
Teflon	1/4" to 1"	1/2" to 48"	48"

*Call for availability.

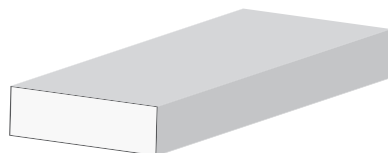

Extruded UHMW Wear Strip in Coils

Part No.	Thickness	Width*	Length
14010216C100	1/8"	1"	100 ft
14010224C100	1/8"	1-1/2"	100 ft
14010248C100	1/8"	3"	100 ft
14010416C250	1/4"	1"	250 ft
14010424C250	1/4"	1-1/2"	250 ft
14010432C250	1/4"	2"	250 ft
14010448C250	1/4"	3"	250 ft

*Additional widths are available.

